


## POLYPROPYLENE HOT MELT DOUBLE-SIDED TAPE

### PRODUCT DESCRIPTION

Hot melt double sided tape made with a solvent-free formulation based on synthetic rubbers and hydrocarbon resins. Suitable for general purpose in the paper converting and leather goods industry. Also used for lamination of various materials and splices. Minimum and maximum operating temperature: -10 °C / +50 °C.

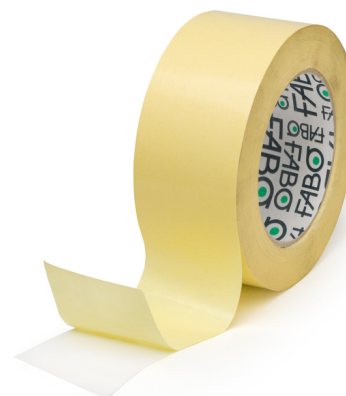

### FEATURES



Double sided  
tape



Exhibition  
tape



Operating temperature  
-10 °C / +50 °C

### MAIN APPLICATIONS



Decorative / Do it  
yourself



Leather goods  
industry

### BACKING MATERIAL

TRANSPARENT BIAXIALLY  
ORIENTED POLYPROPYLENE

### AVAILABLE VERSIONS

J = jumbo

### COLOURS



TRANSPARENT

### TYPE OF ADHESIVE

TRANSPARENT HOT MELT

### LINER

LIGHT YELLOW SILICONIZED PAPER

TECHNICAL DATA	Metric	Values	Test method
Total thickness (adhesive + backing)	µm	80	AFERA 5006
Liner thickness	µm	70	AFERA 5006
Adhesion on steel	N/cm	7	AFERA 5006
Shear on steel	h	>200	AFERA 5001
Tensile strength	N/cm	42	AFERA 5004
Elongation at break	%	160	AFERA 5004

#### Technical Informations, storage and product use

The product must be used within 12 months from the delivery date (6 months if jumbo). It is advisable to keep the material in its original packaging, away from heat sources and away from direct light. The storage temperature must be between 15° and 30° C and the relative humidity between 40 and 60%. For storage temperatures other than those indicated, recondition the product to the levels described above. The technical data shown in the data sheets are the average of the analyzes obtained on normal production. Aging can determine the variation of some technical and aesthetic characteristics of the product within the time limits indicated above without affecting its quality and functionality. The technical data shown are reported with a tolerance of +/- 10% and may be modified at any time for production needs or technical updates.

Fabo spa declines all responsibility for direct damage and for the consequences deriving from improper use of the product. It is advisable to check the conformity of the product in relation to the specific conditions of use.

Rev.01\_01/03/2023