


HOT MELT DOUBLE-SIDED COTTON CLOTH TAPE

PRODUCT DESCRIPTION

Double sided tape with cotton cloth backing and solvent-free hot melt adhesive based on synthetic rubbers and hydrocarbon resins. Suitable for temporary fixing of carpets, felts applications and heel pads reinforcements in the footwear industry. Also used for lamination of various materials and splices. Minimum and maximum operating temperature: -10 °C / +50 °C.

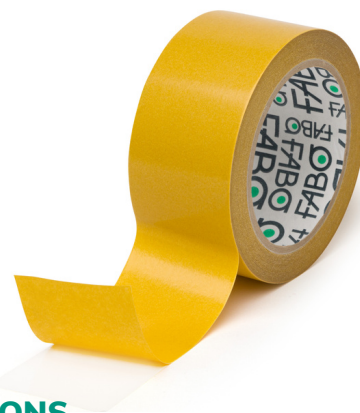

FEATURES



Double sided
tape



Operating temperature
-10 °C / +50 °C

MAIN APPLICATIONS



Professional carpet
fixing



Decorative / Do it
yourself

BACKING MATERIAL

COTTON CLOTH

TYPE OF ADHESIVE

WHITE HOT MELT

LINER

BROWN SILICONIZED PAPER

AVAILABLE VERSIONS

J = jumbo

COLOURS

 WHITE

TECHNICAL DATA	Metric	Values	Test method
Total thickness (adhesive + backing)	µm	235	AFERA 5006
Liner thickness	µm	70	AFERA 5006
Adhesion on steel	N/cm	12	AFERA 5006
Shear on steel	h	>3	AFERA 5001
Tensile strength	N/cm	22	AFERA 5004
Elongation at break	%	4	AFERA 5004

Technical Informations, storage and product use

The product must be used within 12 months from the delivery date (6 months if jumbo). It is advisable to keep the material in its original packaging, away from heat sources and away from direct light. The storage temperature must be between 15° and 30° C and the relative humidity between 40 and 60%. For storage temperatures other than those indicated, recondition the product to the levels described above. The technical data shown in the data sheets are the average of the analyzes obtained on normal production. Aging can determine the variation of some technical and aesthetic characteristics of the product within the time limits indicated above without affecting its quality and functionality. The technical data shown are reported with a tolerance of +/- 10% and may be modified at any time for production needs or technical updates.

Fabo spa declines all responsibility for direct damage and for the consequences deriving from improper use of the product. It is advisable to check the conformity of the product in relation to the specific conditions of use.

Rev.01_01/03/2023