


HIGH THICKNESS PRINTABLE ACRYLIC ADHESIVE TAPE

PRODUCT DESCRIPTION

Adhesive tape with solvent-free water-based acrylic adhesive, printable on the back with corona treatment. The increased thickness of the backing guarantees a high strength packaging. Suitable for heavy weight box sealing with manual dispensers or automatic carton sealing machines.

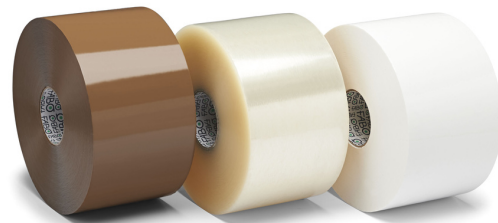

FEATURES



Noisy unwinding



Printable on the back



Solvent free



Increased thickness



UV resistant

MAIN APPLICATIONS



Heavy weight box sealing

BACKING MATERIAL

BIAXIALLY ORIENTED POLYPROPYLENE

TYPE OF ADHESIVE

WATER BASED ACRYLIC

AVAILABLE VERSIONS

COLOURS



BROWN



WHITE



TRANSPARENT

TECHNICAL DATA	Metric	Values	Test method
Backing thickness	µm	50	AFERA 5006
Total thickness	µm	70	AFERA 5006
Adhesion on steel	N/cm	2.4	AFERA 5001
Breaking load	N/cm	65	AFERA 5004
Longitudinal elongation	%	170	AFERA 5004

Technical Informations, storage and product use

The product must be used within 12 months from the delivery date (6 months if jumbo). It is advisable to keep the material in its original packaging, away from heat sources and away from direct light. The storage temperature must be between 15° and 30° C and the relative humidity between 40 and 60%. For storage temperatures other than those indicated, recondition the product to the levels described above. The technical data shown in the data sheets are the average of the analyzes obtained on normal production. Aging can determine the variation of some technical and aesthetic characteristics of the product within the time limits indicated above without affecting its quality and functionality. The technical data shown are reported with a tolerance of +/- 10% and may be modified at any time for production needs or technical updates.

Fabo spa declines all responsibility for direct damage and for the consequences deriving from improper use of the product. It is advisable to check the conformity of the product in relation to the specific conditions of use.

Rev.01_01/03/2023